

35×35×10mm

DC Axial-Flow Fan

★ General Specification(一般规格)

☆ Material: Frame And Impeller: Thermal Plastic UL 94V-0

☆ Lead Wires: UL Type

RED Wire Positive(+)

BLACK Wire Negative(-)

☆ Insulation Resistance: 10MΩ Or Over With a DC250V Megger


☆ Dielectric Withstand Voltage: AC500V 1S

☆ Allowable Ambient Temperature Range:


-10°C ~ +70°C(Operation)

-40°C ~ +70°C(Storage)

★ Dimensions Drawing(外观图)

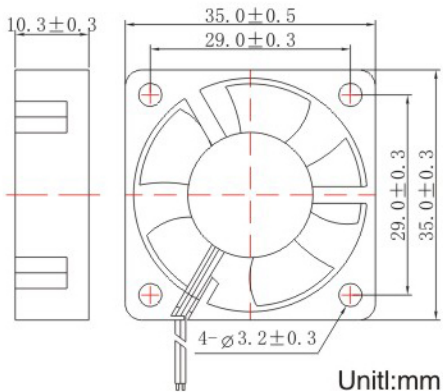

★ Characteristic Curves(特性曲线)

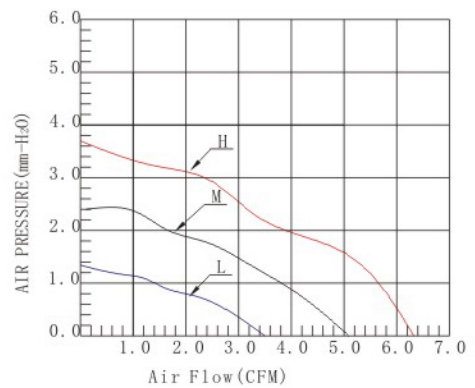

★ Specifications(规格)

Model (型号)	Bearing System (培林)	Rated Voltage (V) (电压)	Operation Voltage (V) (电压范围)	Current (A) (电流)	Input power (W) (功率)	Speed (RPM) (转速)	Air Flow (CFM) (风量)	Static Pressure (mm-H ₂ O) (静压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
YD053510HS	Sleeve	5	4.5~5.5	0.23	1.15	9000	6.30	3.68	32.37	9
YD053510MS				0.22	1.10	7000	5.06	2.44	25.88	9
YD053510LS				0.13	0.65	5000	3.51	1.28	20.26	9
YD053510HB	Ball			0.23	1.15	9000	6.30	3.68	32.37	9
YD053510MB				0.22	1.10	7000	5.06	2.44	25.88	9
YD053510LB				0.13	0.65	5000	3.51	1.28	20.26	9
YD123510HS	Sleeve	12	10.8~13.2	0.14	1.68	9000	6.30	3.68	32.37	9
YD123510MS				0.11	1.32	7000	5.06	2.44	25.88	9
YD123510LS				0.08	0.96	5000	3.51	1.28	20.26	9
YD123510HB	Ball			0.14	1.68	9000	6.30	3.68	32.37	9
YD123510MB				0.11	1.32	7000	5.06	2.44	25.88	9
YD123510LB				0.08	0.96	5000	3.51	1.28	20.26	9